DELABIE

TEMPOFIX 3 wall-mounted frame system with time flow WC valve



Ref. 578300-578230

3L/6L dual flush time flow valve

DESCRIPTION

TEMPOFIX 3 wall-mounted frame system with time flow WC valve -

Ref.578300-578230

Wall-mounted frame system for wall-hung WCs:
- Black powder-coated steel frame.
- Fixes to load-bearing walls.
- Frame height can be adjusted from 0 - 200mm (with 1m mark).
- Ø 32mm flush tube with Ø 55mm connection washer.
- Ø 100mm PVC soil pipe and PVC collar with waterproof seal, with 2 settings positions.
- Delivered pre-mounted.
- For thick walls 70 - 130mm.
- 10-year warranty.

Fitted with TEMPOFLUX 2 time flow direct flush valve:
- Ø 195mm chrome-plated wall plate with concealed fixings.
- 3L/6L dual flush can be adjusted to 2L/4L.
- Soft-touch operation.
- Vacuum breaker.
- Stopcock and flow rate/volume adjuster.
- Solid brass body and shock-resistant, scale-resistant mechanism.
- In-line inlet M¾".
- Acoustic level complies with European standard EN 12541 class II.

Technical characteristics: see TEMPOFLUX 2 ref. 762902.

Kit contents:
(578300): frame system, soil pipe Ø 100mm, flush tube, valve with cover, vacuum breaker, connection accessories.
(578230): control plate, fixings.

ADVANTAGES

- Easy and quick to install: supplied pre-mounted
- Install behind wall
- 3L/6L dual flush, can be adjusted to 2L/4L
- Direct flush: no water stagnation

© Delabie


DELABIE

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 wall-mounted frame system with time flow WC valve -

Ref.578300-578230

Technology	Time flow
Inaltime	1000 - 1320 mm
Conector	3/4"
Finisaj	Chrome-plated metal
Width	350 mm
Depth	157 - 177 mm

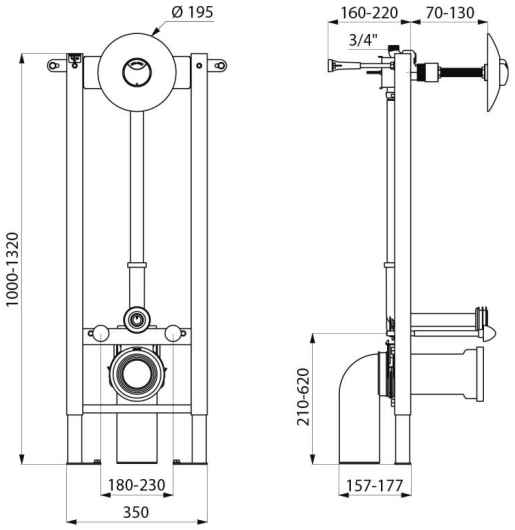

© Delabie