DELABIE

TEMPOFIX 3 wall-mounted frame system with time flow WC valve



Ref. 564060BE-763040

TEMPOFLUX 3 AB dual flush 3L/6L time flow valve - Ø90

DESCRIPTION

TEMPOFIX 3 wall-mounted frame system with time flow WC valve -

Ref.564060BE-763040

Wall-mounted frame system W.350mm for wall-hung WCs:
- Black powder-coated steel frame.
- Fixes to load-bearing walls.
- Frame height can be adjusted from 0 - 200mm (with 1m mark).
- Ø 32mm flush tube with Ø 55mm connection washer.
- ABS soil pipe, Ø 90mm HDPE outlet with waterproof seal, with 2 setting positions.
- Delivered pre-mounted.
- Compatible with solid walls from 10 - 120mm.
- 10-year warranty

Fitted with TEMPOFLUX 3 F¾" time flow direct flush valve:
- Chrome-plated metal wall plate 170 x 170mm.
- Waterproof recessing housing.
- Soft-touch operation.
- Dual flush 3L/6L, can be adjusted to 2L/4L.
- AB anti-blocking system.
- Backflow prevention device inside the housing.
- Integrated stopcock and flow rate adjuster.
- Acoustic level complies with European standard EN 12541 class II.
- Compatible with sea water and grey water.

Technical characteristics: see TEMPOFLUX 3 ref. 763BOX-763040.

Kit contents:
(564060BE): frame system, soil pipe Ø 90mm, flush tube, recessed housing with cover, valve configured for system flush, vacuum breaker, stopcock, connection accessories.
(763040): control plate, collar for waterproofing, time flow cartridge.

ADVANTAGES

- Easy and quick to install: supplied pre-mounted
- For installation behind walls
- 3L/6L dual flush, can be adjusted to 2L/4L
- Direct flush: no water stagnation

© Delabie


DELABIE

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 wall-mounted frame system with time flow WC valve -

Ref.564060BE-763040

Technology	Time flow
Inaltime	1000 - 1320 mm
Conector	3/4"
Finisaj	Chrome-plated metal
Width	350 mm
Depth	170 - 190 mm

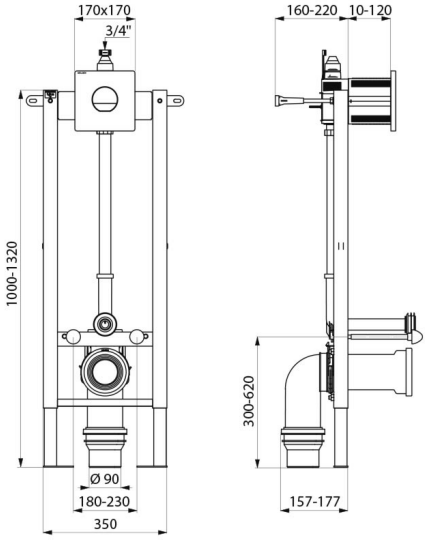

© Delabie