DELABIE

TEMPOFIX 3 wall-mounted frame system with electronic WC valve



Ref. 547000-546412

Mains supply electronic valve

DESCRIPTION

TEMPOFIX 3 wall-mounted frame system with electronic WC valve -

Ref.547000-546412

Frame system for wall-hung WCs:
- Black powder-coated steel frame.
- Wall-mounted frame system for fixing to load-bearing walls.
- Frame height can be adjusted from 0 - 200mm (with 1m mark).
- Ø 32mm flush tube with Ø 55mm connection washer.
- PVC soil pipe, Ø 100mm outlet to be glued to waterproof seal, with 2 setting positions.
- Delivered pre-mounted.
- Compatible with solid walls from 26 - 130mm.
- 10-year warranty.

Fitted with TEMPOMATIC F1" electronic direct flush valve:
- Mains supply with 1" solenoid valve.
- 230/12V transformer.
- IP65 independent electronic unit.
- Recessed housing below stainless steel wall plate 320 x 220mm.
- Shock-resistant infrared presence detection sensor.
- Voluntary activation flush (when hand is detected ~4cm in front of the sensor) or automatically (when the user leaves).
- Time flow ~7 seconds can be adjusted 3 - 12 seconds.
- Integrated stopcock and flow rate adjuster.
- Detection distance and flow rate/volume can be adjusted by the installer.
- Suitable for rimless pans without flow rate regulation and suitable for people with reduced mobility

Technical characteristics: see TEMPOMATIC WC ref. 463326.

Kit contents:
(547000): frame system, soil pipe Ø 100mm, flush tube, valve, electronic housing, connection accessories.
(546412): control plate, fixings.

ADVANTAGES

- Total hygiene: no manual contact
- Install behind the wall
- Quick and easy to install: supplied
- pre-mounted
- Direct flush: no stagnant water

© Delabie


DELABIE

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 wall-mounted frame system with electronic WC valve -

Ref.547000-546412

Technology	Electronic
Inaltime	1000 - 1320 mm
Conector	1"
Supply	Mains supply 230/12V
Width	350 mm
Depth	157 - 177 mm

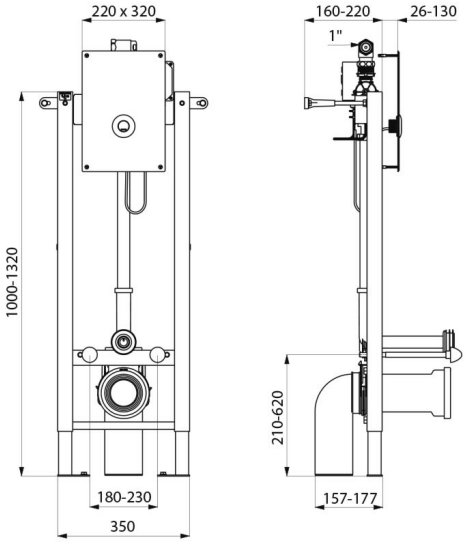

© Delabie