DELABIE

TEMPOMATIC dual control direct flush WC valve



Ref. 464PBOX-464006

Electronic, battery-operated

DESCRIPTION

TEMPOMATIC dual control direct flush WC valve -

Ref.464PBOX-464006

TEMPOMATIC recessed, dual control, electronic valve for direct flush:
Battery operated with 123 6V Lithium batteries.
Satin finish stainless steel wall plate 186 x 186mm and chrome-plated metal button, with integrated electronics.
Waterproof recessing housing:
- Collar with waterproof seal.
- Hydraulic connection to the outside and maintenance from the front.
- Adjusts to all types of installation (rails, solid walls, panels).
- Compatible with wall finishes from 10 - 120mm (while maintaining the minimum recessing depth of 93mm).
- Suitable for standard or "pipe-in-pipe" supply.
- Stopcock and flow rate adjustment, activation and electronic unit are all integrated and accessible from the front.
- TEMPOMATIC F¾" flush valve is compatible with sea water and grey water.
- Backflow prevention device inside the housing.
- Supplied in 2 kits: secure system flush without sensitive elements.
Shock-resistant infrared presence detection sensor.
Detection delay is 10 seconds.
Voluntary activation (anti-blocking push-button) or automatically when the user leaves.
Independent push-button: the flush will activate even if the power supply fails.
"Intelligent" automatic rinsing: flush volume adapts according to use.
3 programmes (rinsing volume can be set according to type of WC pan).
Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after the last use.
Outlet connection for PVC tube Ø26/32mm. Base flow rate: 1L/sec.
Suitable for rimless WC pans without flow rate regulation and suitable for people with reduced mobility.
10-year warranty.

Kit contents:
(464PBOX): recessed housing with cover, valve configured for system flush, vacuum breaker, stopcock, connection accessories.
(464006): control plate, 6V lithium batteries, collar for waterproofing, solenoid valve, cartridge.

ADVANTAGES

- Total hygiene: operate without manual contact
- Direct flush: no water stagnation
- Voluntary or automatic activation
- Waterproof housing, adjustable and modular


© Delabie

TECHNICAL CHARACTERISTICS

TEMPOMATIC dual control direct flush WC valve -

Ref.464PBOX-464006

Technology	Electronic & time flow
Inaltime	186 mm
Conector	F3/4"
Finisaj	Stainless steel satin finish
Supply	6V batteries
Supply	6 V battery-operated
Width	186 mm
Depth	93 - 190 mm

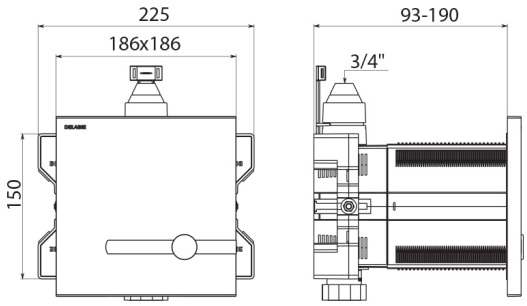

© Delabie