DELABIE

TEMPOMIX 3 time flow mixer

Ref. 794BOX3-794250

Soft-touch operation



DESCRIPTION

TEMPOMIX 3 time flow mixer - Ref.794BOX3-794250

TEMPOMIX 3 recessed time flow basin mixer:
Tamperproof chrome-plated metal plate 160 x 160mm.
Waterproof recessing housing:
- Collar with waterproof seal.
- Hydraulic connection from the outside and maintenance from the front.
- Adjusts to all types of installations (rails, load-bearing walls, panels).
- Compatible with wall finishes 10 - 120mm.
- Suitable for standard or "pipe in pipe" supply.
- Stopcocks and flow rate adjustment, filters, non-return valves and cartridge are all integrated and accessible from the front.
- TEMPOMIX 3 single control mixer F½".
- Supplied in 2 kits: secure system flush without sensitive elements.
Temperature control and operation via the push-button.
Maximum temperature limiter (can be adjusted by installer).
Soft-touch operation.
Time flow ~7 seconds.
Flow rate pre-set at 3 lpm at 3 bar pressure, can be adjusted 1.4 - 6 lpm.
Scale-resistant flow straightener.
Spout L. 190mm with smooth interior and low water volume (reduces niches where bacteria can develop).
Suitable for people with reduced mobility.
10-year warranty.

Kit contents:
(794BOX3): recessed housing with cover, valve configured for system flush, stopcocks and connection accessories.
(794250): control plate, valve, collar for waterproofing and interior reinforcement fixing.

ADVANTAGES

- 85% water savings
- Soft-touch operation, temperature selection
- Recessed installation, concealed fixings
- Adjustable, modular waterproof housing


© Delabie

DELABIE

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 time flow mixer - Ref.794BOX3-794250

Technology	Time flow
Inaltime	160 mm
Debit	3 lpm
Conector	F1/2"
Spout Length	190 mm
Width	160 mm
Depth	93 - 190 mm
Installation:	Reccesed

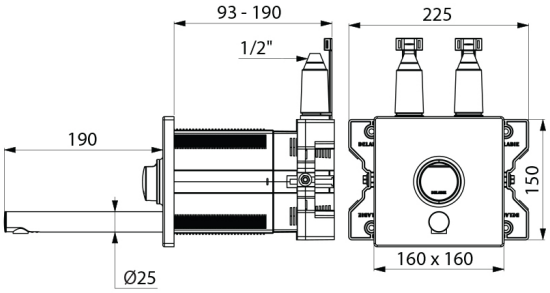

© Delabie