DELABIE

BINOPTIC MIX electronic mixer



Ref. 378MCHLH

Mains supply

DESCRIPTION

BINOPTIC MIX electronic mixer - Ref.378MCHLH

Deck-mounted electronic basin mixer:
Independent IP65 electronic control unit.
230/12V mains supply with transformer.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
Scale-resistant flow straightener.
Adjustable duty flush (pre-set flush ~60 seconds every 24hr after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Chrome-plated brass body.
PEX flexibles with filters and solenoid valves M3/8".
Fixing reinforced by 2 stainless steel rods.
Anti-blocking security.
Spout with smooth interior and low volume of water (reduces niches where bacteria can develop).
Side temperature control with long lever and adjustable maximum temperature limiter.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- 85% water savings
- Increased resistance: chrome-plated brass spout
- Anti-bacterial duty flush

TECHNICAL CHARACTERISTICS

BINOPTIC MIX electronic mixer - Ref.378MCHLH

Technology	Electronic
Debit	3 lpm
Conector	M3/8"
Supply	230/12V mains supply
Drop Height	110 mm
Spout Length	135 mm
Installation:	Deck-mounted

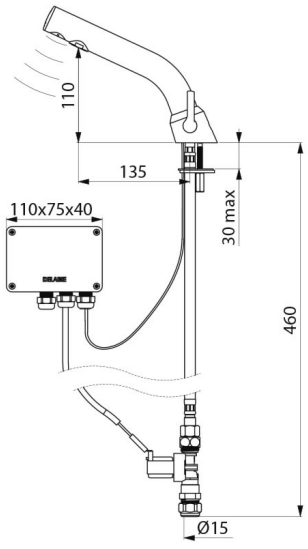

© Delabie