DELABIE

# SECURITHERM BIOCLIP thermostatic basin mixer

Ref. H960515

Single hole sequential thermostatic mixer H. 85mm L. 120mm

## DESCRIPTION

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref.H960515**

Deck-mounted SECURITHERM thermostatic basin mixer.
BIOCLIP: can be easily removed for cleaning and disinfection.
Sequential thermostatic mixer: opens and closes with cold water.
Single hole mixer with straight spout, H. 85mm L. 120mm, fitted with a hygienic flow straightener, no build-up of impurities and withstands thermal shocks.
Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails.
Securitouch thermal insulation prevents burns.
No risk of cross flow between the hot and cold water.
No non-return valve.
Scale-resistant sequential thermostatic cartridge for single control adjustment of flow rate and temperature.
Adjustable temperature from cold water up to 40°C with maximum temperature limiter set at 40°C.
Thermal and chemical shocks are possible.
Spout and body with smooth interiors and low water volume.
Flow rate regulated at 7 lpm.
No manual contact thanks to Hygiene control lever L. 146mm.
No pop-up waste.
PEX flexibles F3/8" supplied with chrome-plated brass stopcocks, filters and Ø 15mm conical connectors.
Reinforced fixing via 2 stainless steel rods.
Ideal for healthcare facilities, retirement and care homes , hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.
Also available with copper tails.

## ADVANTAGES

© Delabie

# TECHNICAL CHARACTERISTICS

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref.H960515**

| | |
|---|---|
| Technology | SECURITHERM BIOCLIP sequential Securitouch |
| Inaltime | 178 mm |
| Debit | 7 lpm |
| Conector | M1/2" Ø 15mm |
| Finisaj | Chrome-plated brass |
| Drop Height | 85 mm |
| Spout Length | 120 mm |
| Temperature limiter | 40 °C |

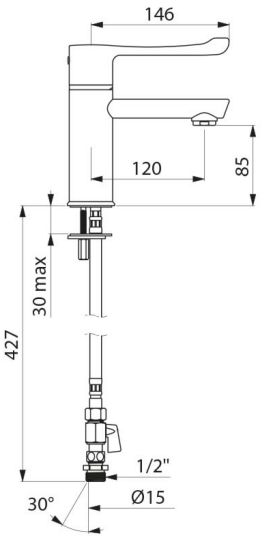


© Delabie