DELABIE

TEMPOMIX 3 shower kit



Ref. 794BOX1-794219

Time flow single control, top inlet



DESCRIPTION

TEMPOMIX 3 shower kit - Ref.794BOX1-794219

Recessed time flow shower mixer with soft-touch operation:
Tamperproof chrome-plated metal wall plate 160 x 160mm.
Waterproof recessing housing:
- Collar with waterproof seal.
- Hydraulic connection from the exterior and maintenance from the front.
- Top inlet.
- Adjusts to all types of installation (rails, solid walls, panels).
- Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 93mm).
- Suitable for standard pipe supply or "pipe in pipe".
- Stopcocks and flow rate adjustment, filters, non-return valves and cartridge are integrated and can be accessed from the front.
- TEMPOMIX 3 single control mixer F½".
-Supplied in 2 kits: secure system flush without sensitive elements.
Temperature control and operation via the push-button.
Maximum temperature limiter (can be adjusted by installer).
Time flow ~30 seconds, can be adjusted.
Soft-touch operation.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Suitable for people with reduced mobility.
10-year warranty.

Kit contents:
(794BOX1): recessed housing with cover, valve with temporary caps configured for system flush and connection accessories.

ADVANTAGES


- 80% water savings
- Soft-touch operation
- Recessed installation, concealed fixings
- Adjustable, modular waterproof housing

© Delabie

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 shower kit - Ref.794BOX1-794219

Technology	Time flow
Inaltime	160 mm
Debit	6 lpm
Conector	1/2"
Width	160 mm
Depth	93 - 190 mm

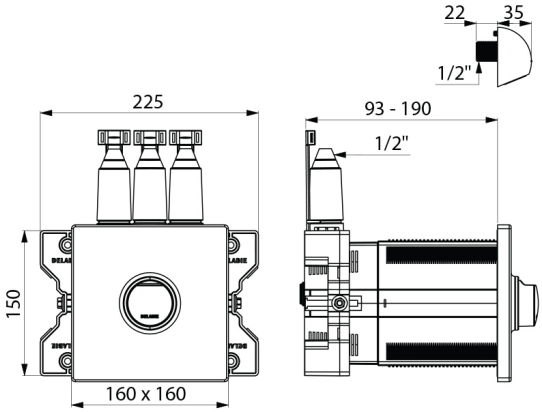

© Delabie