DELABIE

SECURITHERM shower panel

Ref. 792305

Thermostatic time flow



DESCRIPTION

SECURITHERM shower panel - Ref.792305

Thermostatic time flow shower panel:
Anodised aluminium shower panel for wall-mouted, exposed installation.
With top inlet via in-line stopcocks M1/2".
SECURITHERM thermostatic mixer.
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding failsafe: automatic shut-off if cold water fails.
Anti-cold showers function: automatic shut-off if hot water fails.
Thermal shocks are possible.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate set at 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
With soap dish.
Concealed fixings.
Filters and non-return valves.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Thermostatic temperature regulation
- Instant shut-off if cold water fails
- 80% water savings
- Aluminium panel, brass controls

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref.792305

Technology	Time flow
Inaltime	1050 mm
Debit	6 lpm
Conector	M1/2"
Finisaj	Aluminium
Temperature limiter	Thermostatic
Width	210 mm
Depth	65 mm
Water supply	In-line

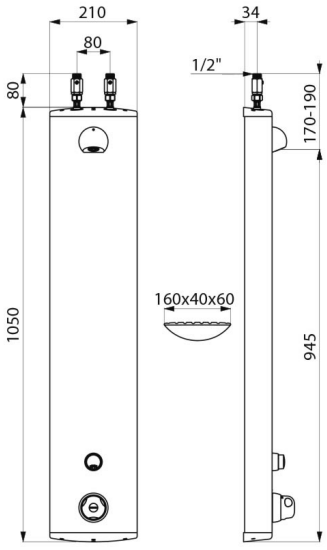

© Delabie