DELABIE

TEMPOMIX 3 shower kit



Ref. 794450

Time flow single control

DESCRIPTION

TEMPOMIX 3 shower kit - Ref.794450

Exposed time flow shower kit:
TEMPOMIX 3 single control mixer ¾", top outlet.
For wall-mounted, exposed installation.
Temperature control and operation via the push-button.
Maximum temperature limiter (can be adjusted by the installer).
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant TONIC JET shower head with automatic flow rate regulation.
Chrome-plated solid brass.
Integrated filters and non-return valves.
Chrome-plated metal push-button.
Shower column Ø 16mm with reinforced collar (fixing plate and screws included).
M1/2" offset connectors for 130 - 170mm centres.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- 80% water savings
- Soft-touch operation
- Time flow system tested to over 500,000 operations

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 shower kit - Ref.794450

Technology	Time flow
Inaltime	1010 mm
Debit	6 lpm
Conector	M1/2"
Width	150 mm

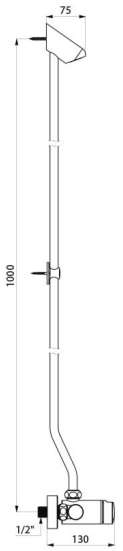

© Delabie