DELABIE

# SECURITHERM shower panel

Ref. 792314CF

Thermostatic time flow, comfort 10 lpm



## DESCRIPTION

**SECURITHERM shower panel - Ref.792314CF**

SECURITHERM thermostatic time flow shower panel:
Large model stainless steel shower panel for wall mounted, exposed installation.
Concealed inlet via flexibles M1/2".
Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.
Anti-scalding safety: automatic shut-off if cold or hot water supply fails.
Thermal shocks are possible.
Soft-touch operation.
Time flow ~30 seconds.
Flow rate 10 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Integrated soap dish.
M1/2" stopcocks.
Concealed fixings.
Filters and non-return valves.
10-year warranty.


## ADVANTAGES

- Thermostatic temperature regulation
- Instant shut-off if cold water fails
- 80% water savings
- Stainless steel sheath, brass controls

## TECHNICAL CHARACTERISTICS

**SECURITHERM shower panel - Ref.792314CF**

| | |
|---|---|
| Technology | Time flow |
| Inaltime | 1220 mm |
| Debit | 10 lpm |
| Conector | M1/2" |
| Finisaj | Stainless steel |
| Temperature limiter | Thermostatic |
| Width | 250 mm |
| Depth | 100 mm |
| Water supply | Concealed |

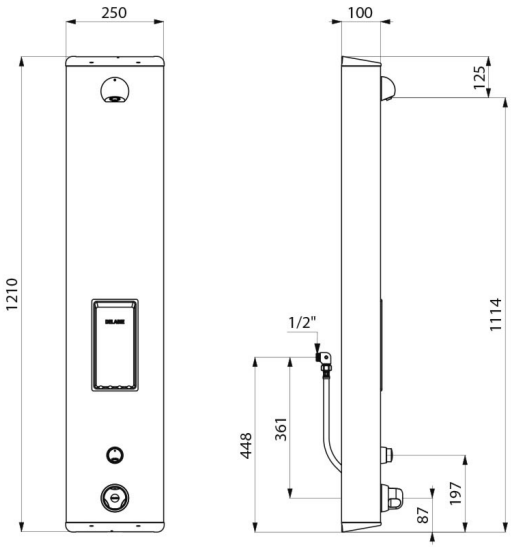


© Delabie