


## TEMPOFIX 3 frame system for urinals

Ref. 543006-778700

Time flow flush valve - For urinals Ø 35mm

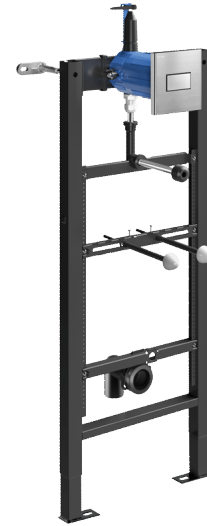

### DESCRIPTION

#### TEMPOFIX 3 frame system for urinals - Ref.543006-778700

Frame system with time flow urinal valve:  
Black powder-coated steel frame for wall mounted installation.  
Fixes to floor and load-bearing walls, anchoring bolts supplied.  
Adjustable bracket 95 - 280mm.  
Frame height can be adjusted 0 - 200mm.  
Ø 50mm soil pipe with waterproof seal.  
Delivered pre-mounted.  
Compatible with solid wall finishes from 13 - 120mm.  
10-year warranty.

Fitted with a TEMPOFLUX F½" time flow flush valve:  
Satin finish stainless steel wall plate 145 x 145mm.  
Chrome-plated metal button.  
Waterproof recessing housing.  
Soft-touch operation.  
Time flow pre-set at ~3 seconds.  
Flow rate pre-set at 0.15 L/sec. at 3 bar, can be adjusted to 0.3 L/sec.  
Complies with European standard EN 12541 (class II acoustic level).  
Connection with Ø 35mm connection washer (for standard urinals).

Technical features: see TEMPOFLUX urinal ref. 778BOX-778700.

#### Kit contents:

(543006): frame system, tube with connection washer Ø 35mm, soil pipe sleeve Ø 50mm, recessed housing with cover, valve configured for system flush and connection accessories.

(778700): control plate, collar for waterproofing, valve, time flow cartridge, filter and stopcock.

### ADVANTAGES



Quick and easy to install:  
delivered pre-mounted



Soft-touch operation



ECO time flow set 3 seconds



Install behind wall, on frame system

## TECHNICAL CHARACTERISTICS

### TEMPOFIX 3 frame system for urinals - [Ref.543006-778700](#)

Technology	Time flow
Inaltime	985 - 1385 mm
Conector	1/2"
Finisaj	Satin finish stainless steel
Width	430 mm
Depth	160 - 220 mm

