
DELABIE

TEMPOFIX 3 frame system for urinals

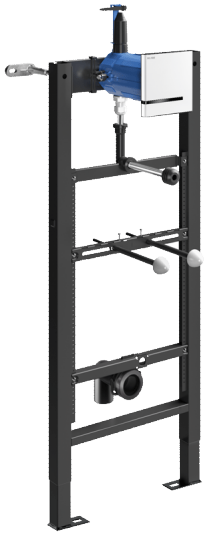

Ref. 543006-430026

Battery-operated electronic valve - For urinals Ø 35mm

DESCRIPTION

TEMPOFIX 3 frame system for urinals - Ref.543006-430026

Frame system with electronic urinal valve:
Black powder-coated steel frame for wall-mounted installation.
Fixes to floor and load-bearing walls with anchoring bolts supplied.
Adjustable bracket 95 - 280mm.
Frame height can be adjusted from 0 - 200mm.
Ø 50mm soil pipe with waterproof seal.
Delivered pre-mounted.
Compatible with wall finishes 13 - 120mm.
10-year warranty.

Fitted with TEMPOMATIC 4 F½" direct flush electronic valve:
Operated by 123 6V Lithium batteries.
White powder-coated stainless steel plate 145 x 145mm with integrated electronics.
Shock-resistant infrared presence detection sensor.
Waterproof recessing housing.
Detection delay is 10 seconds.
3 programmes (rinsing volume can be adjusted according to urinal type).
High frequency mode (exclusive to DELABIE).
Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted.
Hygienic duty flush every 12 or 24 hours (or OFF) after last use: prevents vacuums.
Connection with Ø 35mm connection washer (for standard urinal valves).

Technical features: see TEMPOMATIC urinal ref. 430PBOX-430006.

Kit contents:
(543006): frame system, tube with connection washer Ø 35mm, soil pipe sleeve Ø 50mm, recessed housing with cover, valve configured for system flush and connection accessories.
(430026): control plate, 6V lithium batteries, collar for waterproofing, valve, solenoid valve, filter and stopckcock.

ADVANTAGES

- Total hygiene: no manual contact
- 3 rinsing programmes and high frequency mode
- Easy and quick to install: supplied pre-mounted
- Hygienic duty flush


© Delabie

DELABIE

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 frame system for urinals - Ref.543006-430026

Technology	Electronic
Inaltime	985 - 1385 mm
Conector	1/2"
Finisaj	White powder-coated
Supply	6V batteries
Width	430 mm
Depth	160 - 220 mm

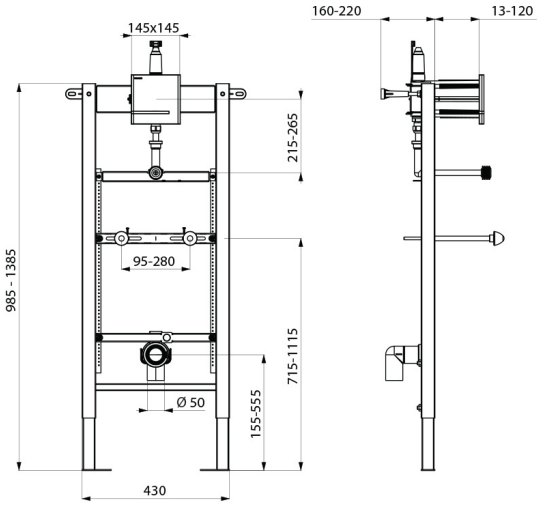

© Delabie