


## TEMPOFIX 3 frame system for urinals

Ref. 543006-430036

Electronic flush valve mains supply - For urinals Ø 35mm

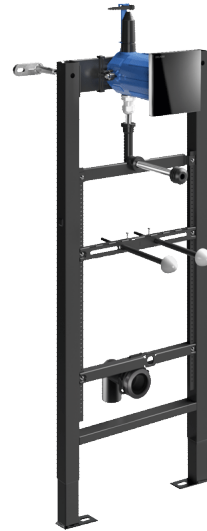

### DESCRIPTION

#### TEMPOFIX 3 frame system for urinals - Ref.543006-430036

Frame system with electronic urinal valve:  
Black powder-coated steel frame for wall-mounted installation.  
Fixes to floor and load-bearing walls, anchoring bolts supplied.  
Adjustable bracket 95 - 280mm.  
Frame height can be adjusted 0 - 200mm.  
Ø 50mm soil pipe with waterproof seal.  
Delivered pre-mounted.  
Compatible with solid wall finishes from 13 - 120mm.  
10-year warranty.

Fitted with TEMPOMATIC 4 F½" electronic valve:  
Battery-operated with 123 6V Lithium batteries.  
Shock-resistant black glass vitro-ceramic wall plate 145 x 145mm with integrated electronics.  
Shock-resistant infrared presence detection sensor.  
Waterproof recessing housing.  
Detection delay is 10 seconds.  
3 programmes (rinsing volume can be set according to urinal type).  
High frequency mode (exclusive to DELABIE).  
Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after last use: prevents vacuums.  
Flow rate pre-set at 0.15 L/sec. at 3 bar, can be adjusted.  
Connection with Ø 35mm connection washer (for standard urinals).

Technical features: see TEMPOMATIC 4 urinal ref. 430PBOX-430036.

#### Kit contents:

(543006): frame system, tube with connection washer Ø 35mm, soil pipe sleeve Ø 50mm, recessed housing with cover, valve configured for system flush and connection accessories.

(430036): control plate, 6V lithium batteries, collar for waterproofing, valve, solenoid valve, filter and stopcock.

### ADVANTAGES



Total hygiene: no manual contact



3 rinsing programmes and high frequency mode



Easy and quick to install: supplied pre-mounted



Hygienic duty flush

## TECHNICAL CHARACTERISTICS

### TEMPOFIX 3 frame system for urinals - [Ref.543006-430036](#)

Technology	Electronic
Inaltime	985 - 1385 mm
Conector	1/2"
Finisaj	Black glass
Supply	6V batteries
Width	430 mm
Depth	160 - 220 mm

