

TEMPOFIX 3 frame system for urinals

Ref. 543006D-430036

Electronic flush valve, battery-op - For urinals with ½" flexible

DESCRIPTION

TEMPOFIX 3 frame system for urinals - Ref.543006D-430036


Frame system with electronic urinal valve:
Black powder-coated steel frame for wall-mounted installation.
Fixes to floor and load-bearing walls, anchoring bolts supplied.
Adjustable bracket 95 - 280mm.
Frame height can be adjusted 0 - 200mm.
Ø 50mm soil pipe with waterproof seal.
Delivered pre-mounted.
Compatible with solid wall finishes from 13 - 120mm.
10-year warranty.

Fitted with TEMPOMATIC 4 F½" electronic valve:
Battery-operated with 123 6V Lithium batteries.
Shock-resistant black glass vitro-ceramic wall plate 145 x 145mm with integrated electronics.
Shock-resistant infrared presence detection sensor.
Waterproof recessing housing.
Detection delay is 10 seconds.
3 programmes (rinsing volume can be set according to urinal type).
High frequency mode (exclusive to DELABIE).
Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after last use: prevents vacuums.
Flow rate pre-set at 0.15 L/sec. at 3 bar, can be adjusted.
Connection with ½" brass connection (for urinals supplied by flexible).

Technical features: see TEMPOMATIC 4 urinal ref. 430PBOX-430036.

Kit contents:

(543006D): frame system, tube with brass union ½" for flexible supply, sleeve for soil pipe Ø 50mm, recessed housing with cover, valve configured for system flush, connection accessories.
(430036): control plate, 6V lithium batteries, collar for waterproofing, valve, solenoid valve, filter and stopcock.

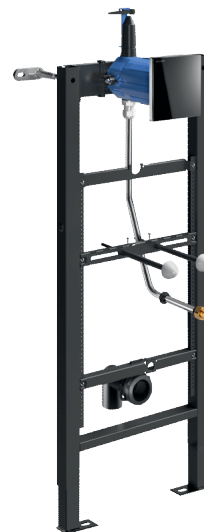

ADVANTAGES



Total hygiene: no manual contact



3 rinsing programmes and high frequency mode



Quick and easy to install: delivered pre-mounted



Hygienic duty flush

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 frame system for urinals - [Ref.543006D-430036](#)

Technology	Electronic
Inaltime	985 - 1385 mm
Conector	1/2"
Finisaj	Black glass
Supply	6V batteries
Width	430 mm
Depth	160 - 220 mm

