


## TEMPOFIX 3 frame system for urinals

Ref. 543000-430000

Mains supply electronic valve - For urinals Ø 35mm

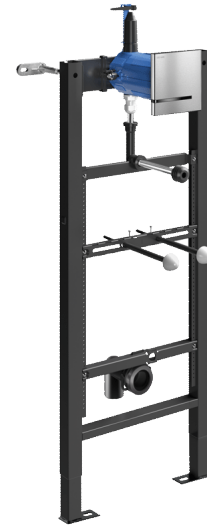

### DESCRIPTION

#### TEMPOFIX 3 frame system for urinals - Ref.543000-430000

Frame system with electronic urinal valve:  
Black powder-coated steel frame for wall-mounted installation.  
Fixes to floor and load-bearing walls with anchoring bolts supplied.  
Adjustable bracket from 95 - 280mm.  
Frame height can be adjusted from 0 to 200mm.  
Ø 50mm soil pipe with waterproof seal.  
Delivered pre-mounted.  
Compatible with solid wall finishes from 13 - 120mm.  
10-year warranty.

Fitted with TEMPOMATIC 4 F½" direct flush electronic valve:  
230/6V mains supply (cable and transformer are supplied).  
Satin stainless steel wall plate 145 x 145mm with integrated electronics.  
Shock-resistant infrared presence detection sensor.  
Waterproof recessing housing.  
Detection delay is 10 seconds.  
3 programmes (rinsing volume can be adjusted according to urinal type).  
High frequency mode (exclusive to DELABIE).  
Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after last use: prevents vaccums.  
Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted.  
Connection with Ø 35mm connection washer (for standard urinals).

Technical features: see TEMPOMATIC urinal ref. 430SBOX-430000.

#### Kit contents:

(543000): frame system, tube with connection washer Ø 35mm, soil pipe sleeve Ø 50mm, recessed housing with cover, valve configured for system flush, connection accessories.

(430000): control plate, integrated transformer, collar for waterproofing, valve, solenoid valve, filter and stopcock.

### ADVANTAGES



Total hygiene: no manual contact



3 rinsing programmes and high frequency mode



Easy and quick to install: supplied pre-mounted



Hygienic duty flush

## TECHNICAL CHARACTERISTICS

### TEMPOFIX 3 frame system for urinals - [Ref.543000-430000](#)

Technology	Electronic
Inaltime	985 - 1385 mm
Conector	1/2"
Finisaj	Satin stainless steel
Supply	230/6V mains supply
Width	430 mm
Depth	160 - 220 mm

