
DELABIE

TEMPOFIX 3 frame system for urinals

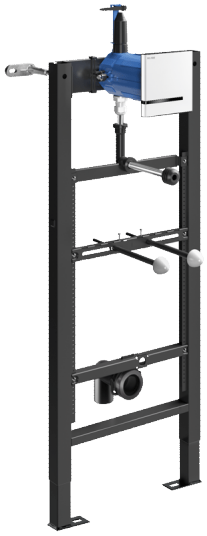

Ref. 543000-430020

Mains supply electronic valve - For urinals Ø 35mm

DESCRIPTION

TEMPOFIX 3 frame system for urinals - Ref.543000-430020

Frame system with electronic urinal valve:
Black powder-coated steel frame for wall-mounted installation.
Fixes to floors and load-bearing walls with anchoring bolts supplied.
Adjustable bracket 95 - 280mm.
Frame height can be adjusted from 0 - 200mm.
Ø 50mm soil pipe with waterproof seal.
Delivered pre-mounted.
Compatible with wall finishes 13 - 120mm.
10-year warranty.

Fitted with TEMPOMATIC 4 F½" electronic valve:
230/6V mains supply.
White powder-coated stainless steel wall plate 145 x 145mm with integrated electronics.
Shock-resistant infrared presence detection sensor.
Waterproof recessing housing.
Detection delay is 10 seconds.
3 programmes (rinsing volume can be adjusted according to urinal type).
High frequency mode (exclusive to DELABIE).
Hygienic duty flush every 24 hours (can be adjusted to every 12 hours or OFF) after last use: prevents vacuums.
Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted.
Connection with Ø 35mm connection washer (for standard urinal valves).

Technical features: see TEMPOMATIC urinal ref. 430SBOX-430020.

Kit contents:
(543000): frame system, tube with connection washer Ø 35mm, soil pipe sleeve Ø 50mm, recessed housing with cover, valve configured for system flush, connection accessories.
(430020): control plate, transformer, collar for waterproofing, valve, solenoid valve, filter and stopcock.

ADVANTAGES


- Total hygiene: no manual contact
- 3 rinsing programmes and high frequency mode
- Easy and quick to install: supplied pre-mounted
- Hygienic duty flush

© Delabie

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 frame system for urinals - Ref.543000-430020

Technology	Electronic
Inaltime	985 - 1385 mm
Conector	1/2"
Finisaj	White powder-coated
Supply	230/6V mains supply
Width	430 mm
Depth	160 - 220 mm

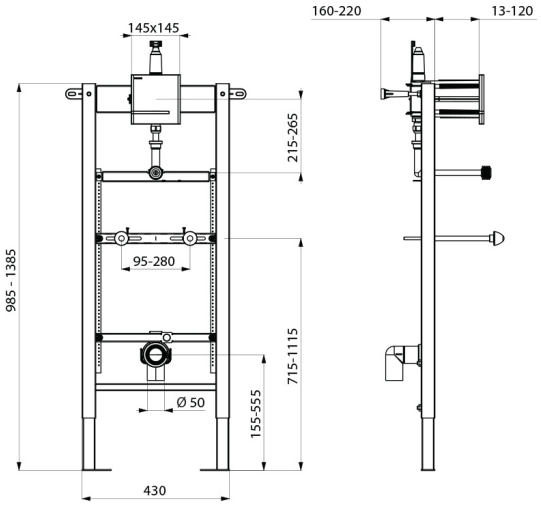

© Delabie