
DELABIE

TEMPOFIX 3 frame system for urinals

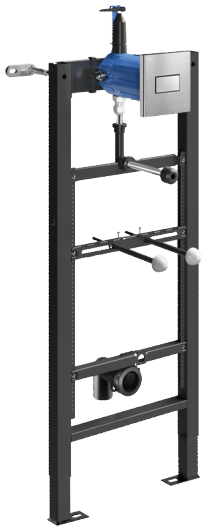

Ref. 543006-778707

Time flow valve 7 seconds - for urinals Ø 35mm

DESCRIPTION

TEMPOFIX 3 frame system for urinals - Ref.543006-778707

Frame-system with time flow urinal valve:
Black powder-coated steel frame for wall-mounted installation.
Fixes to floor and load-bearing walls, anchoring bolts supplied.
Adjustable bracket 95 - 280mm.
Frame height can be adjusted from 0 - 200mm.
Ø 50mm soil pipe with waterproof seal.
Delivered pre-mounted.
Compatible with solid wall finishes from 13 - 120mm.
10-year warranty.

Fitted with a TEMPOFLUX F½" time flow urinal valve
Satin finish stainless steel wall plate 145 x 145mm.
Chrome-plated metal button.
Waterproof recessing housing.
Soft-touch operation.
Time flow pre-set at ~7 seconds.
Flow rate pre-set at 0.15 L/sec. at 3 bar, can be adjusted up to 0.3 L/sec.
Complies with European standard EN 12541 (class II acoustic level).
Ø 35mm neck tube supply for standard urinals.
Technical features: see TEMPOFLUX urinal ref. 778BOX-778707.

Kit contents:
(543006): frame system, tube with connection washer Ø 35mm, soil pipe sleeve Ø 50mm, recessed housing with cover, valve configured for system flush and connection accessories.
(778707): control plate, collar for waterproofing, valve, time flow cartridge, filter and stopcock.

ADVANTAGES

- Quick and easy to install: supplied pre-assembled
- Soft-touch operation
- 7-second time flow
- Install on frame system behind partition


© Delabie

DELABIE

TECHNICAL CHARACTERISTICS

TEMPOFIX 3 frame system for urinals - Ref.543006-778707

Technology	Time flow
Inaltime	985 - 1385 mm
Conector	1/2"
Finisaj	Satin finish stainless steel
Width	430 mm
Depth	160 - 220 mm

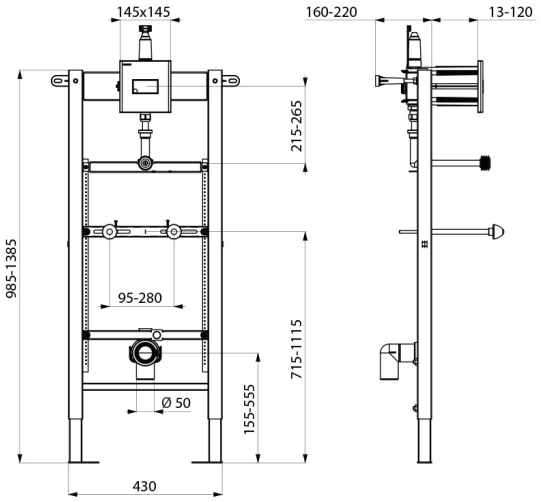

© Delabie