DELABIE

TEMPOMATIC 4 urinal valve

Ref. 430PBOX-430036

Electronic with integrated batteries



DESCRIPTION

TEMPOMATIC 4 urinal valve - Ref.430PBOX-430036

Electronic valve for waterproof, recessed individual urinals:
123 6V Lithium battery-operated.
Black wall plate 145 x 145mm in shock-resistant vitro-ceramic glass with integrated electronics.
Waterproof recessing housing:
- Collar with waterproof seal.
- Hydraulic connection to the outside and maintenance from the front.
- Adjusts to all types of installation (rails, solid walls, panels).
- Compatible with wall finishes 10 - 120mm (while maintaining the minimum recessing depth of 83mm).
- Suitable for standard or "pipe-in-pipe" supply.
- Stopcock and flow rate adjustment, filter and solenoid valve are all integrated and accessible from the front.
- TEMPOMATIC 4 urinal valve F½" is compatible with sea water and grey water.
- Supplied in 2 kits: secure system flush without sensitive elements.
- Shock-resistant infrared presence detection sensor.
Detection delay is 10 seconds.
3 programmes (rinsing volume can be set according to urinal type).
High-frequency mode (exclusive to DELABIE):
- Short rinse after each user.
- Additional rinse at the end of the busy period.
Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after the last use: prevents vacuums.
Flow rate pre-set at 0.15 L/sec. at 3 bar, can be adjusted.
Connection with Ø 35mm connection washer (for standard urinals) or ½" brass connection (for urinals supplied by flexible).
For use with neck tube 752430 or 757430.
Suitable for people with reduced mobility.
10-year warranty.

Kit contents:
(430PBOX): recessed housing with cover, valve configured for system flush, connection accessories.
(430036): control plate, 6V lithium batteries, collar for waterproofing, valve, solenoid valve, filter and stopcock.

ADVANTAGES

Total hygiene: no manual contact

3 rinsing programmes and high-frequency mode


Hygienic duty flash

© Delabie

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 urinal valve - Ref.430PBOX-430036

Technology	Electronic
Inaltime	145 mm
Debit	0.15 l/sec
Conector	F1/2"
Supply	6V battery
Width	145 mm
Depth	83 - 190 mm

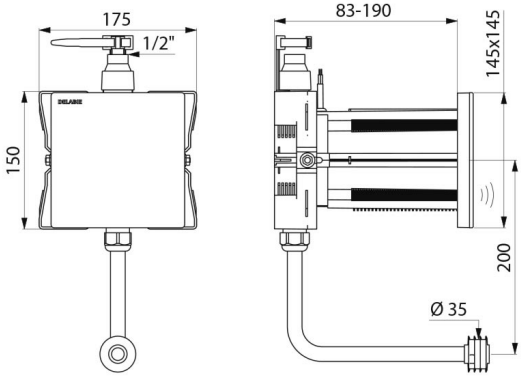

© Delabie