DELABIE

TEMPOMATIC 4 urinal valve

Ref. 479412

Electronic with integrated battery



DESCRIPTION

TEMPOMATIC 4 urinal valve - Ref.479412

Exposed electronic urinal valve with integrated battery:
Battery-operated with integrated 223 6V Lithium battery.
For wall-mounted, exposed installation.
Reduced-stagnation solenoid valve and electronic unit integrated into the valve body.
Shockproof infrared presence detection sensor.
Detection delay is 10 sec.
3 programmes (rinsing volume adjustable in accordance to the type of urinal).
High-frequency mode (exclusive to DELABIE):
- short rinse after each user
- complementary rinse after busy period.
Hygienic duty flush, every 24hr after last use, prevents vacuums in the siphon.
Flow rate 0.15 L/sec. at 3 bar, can be adjusted.
Integrated stopcock and flow rate adjuster.
One-piece chrome-plated metal body.
M1/2" connection.
Angled for recessed supply with Ø 35mm neck tube.
For standard urinals: 50mm gap from wall.
Suitable for people with reduced mobility.
10-year warranty.

Ideal for replacing old installations:
Can easily be installed where there was previously a time flow urinal.

ADVANTAGES


- Total hygiene: no manual contact
- High-frequency mode
- Battery integrated into the valve body
- Hygienic duty flush

© Delabie

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 urinal valve - Ref.479412

Technology	Electronic
Inaltime	450 mm
Debit	0.15 l/sec.
Conector	M1/2"
Supply	6V battery
Depth	85 mm
Width to the wall	50 mm

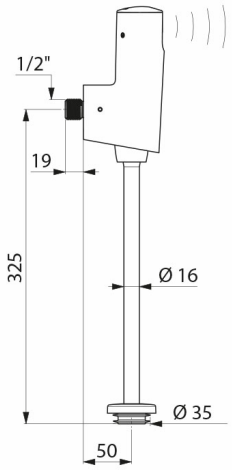

© Delabie