DELABIE

TEMPOMATIC urinal valve

Ref. 428200

Electronic mains supply



DESCRIPTION

TEMPOMATIC urinal valve - Ref.428200

Recessed electronic urinal valve:
Mains supply, electronic control unit 12V with solenoid valve, filter and stopcock M½".
Cross wall installation for walls ? 225mm.
Shock-resistant infrared presence detector.
Detection distance, time flow and flow rate can be adjusted at installation.
Order the 230/12V transformer separately.
Presence detection delay is 3 seconds.
Automatic pre-rinse possible.
Time flow 3 sec. can be adjusted from 3 - 12 seconds.
Hygienic duty flush is possible every 24 hours after last use, prevents vacuums.
Flow rate 0.3 L/sec. at 3 bar pressure, can be adjusted.
Wall plate flush to the wall.
Threaded rods can be cut-to-size.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- ECO time flow set at 3 seconds
- Cross wall installation
- Hygienic duty flush

TECHNICAL CHARACTERISTICS

TEMPOMATIC urinal valve - Ref.428200

Technology	Electronic
Lungime	225 mm
Debit	0.3 l/sec
Conector	1/2"
Supply	Secteur 12V

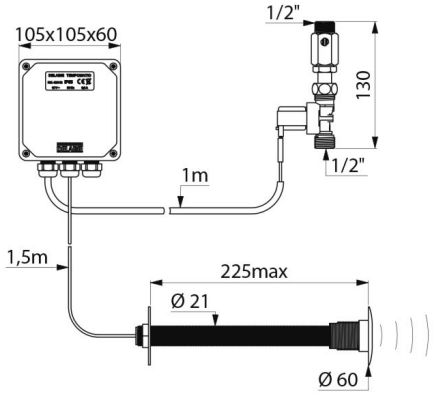

© Delabie