DELABIE

TEMPOMIX



Ref. 790BOX-790219

Time flow single control



DESCRIPTION

TEMPOMIX - Ref.790BOX-790219

Recessed time flow shower kit:
Tamperproof bright polished stainless steel wall plate 160 x 220mm.
Waterproof recessed housing.
10 - 30mm allowance for different wall finishes.
TEMPOMIX ¾" single control mixer.
Ligature-resistant collar.
Temperature control and operation on the push-button.
Maximum temperature limiter (can be adjusted by the installer).
Time flow ~30 seconds, soft-touch operation.
Flow rate 6 lpm at 3 bar.
Chrome-plated, tamperproof ROUND shower head with scale-resistant nozzle and automatic flow rate regulation.
Concealed fixings, stopcocks M½".
Chrome-plated metal control.
Integrated non-return valves and filters.
10-year warranty.

Kit contents:
(790BOX): recessed housing with cover, valve configured for system flush, stopcocks and connection accessories.
(790219): control plate, valve, time flow cartridge, collar for waterproofing, shower head.


ADVANTAGES

- 6 lpm
- Wall recessed installation
- System tested to over 500,000 operations
- Waterproof recessing housing

TECHNICAL CHARACTERISTICS

TEMPOMIX - Ref.790BOX-790219

Technology	Time flow
Height	160 mm
Flow rate	6 lpm
Connector	1/2"
Width	220 mm
Water supply	Concealed

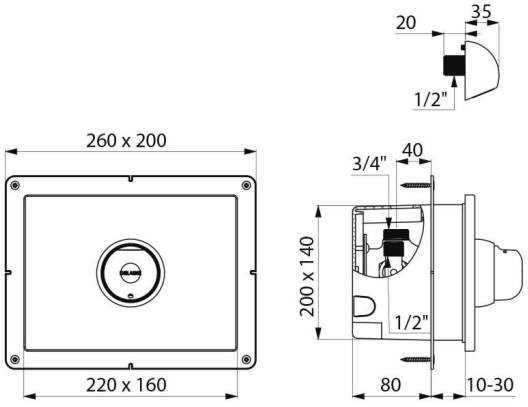

© Delabie