DELABIE

KOMPACT TC washbasin and floor-standing WC combination



Ref. 166600

Polished satin 304 stainless steel - Cross wall - Floor standing WC right side

DESCRIPTION

KOMPACT TC washbasin and floor-standing WC combination -

Ref.166600

Combination unit: washbasin and floor-standing WC pan on right sidewith recessed toilet roll holder.
Service duct installation (through-the-wall).
Bacteriostatic 304 stainless steel.
Polished satin finish.
Stainless steel unit thickness: 2mm.
Rounded corners and edges for improved safety.
Smooth surface for easy cleaning.
Suitable for prisons, police stations, etc.
WC pan is completely welded to washbasin, no screws:
makes cleaning easier and prevents concealment of objects.
Washbasin equipped with time flow tap: stainless steel tamperproofpush-button and anti-blocking system, 7 second time flow, M1/2".
WC equipped with time flow flush valve, 7 second time flow, M3/4".
Water inlet: washbasin M1/2", WC M3/4".
Recessed horizontal water outlet: Ø 100mm
200mm threaded rod can be cut to size (other lengths available on demand).
Weight: 30kg.
[Formerly ref: 0616130006]

ADVANTAGES


- Bacteriostatic 304 stainless steel
- Suitable for secure sector

TECHNICAL CHARACTERISTICS

KOMPACT TC washbasin and floor-standing WC combination -

Ref.166600

Height	1000 mm
Length	615 mm
Finish	Polished satin 304 stainless steel
Width	725 mm
Thickness	2 mm

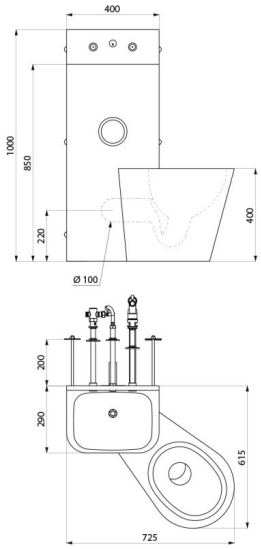

© Delabie