DELABIE

Shower riser rail with EP mechanical mixer



Ref. 2739EPSKIT

Shower riser rail with pressure-balancing mixer

DESCRIPTION

Shower riser rail with EP mechanical mixer - Ref.2739EPSKIT

Shower riser rail with single control mechanical mixer.
• Wall-mounted shower kit with EP shower mixer.
Wall-mounted single control mixer with Securitouch thermal insulation to prevent burns.
Ø 40mm pressure-balancing (EP) ceramic cartridge with pre-set maximum temperature limiter.
Total anti-scalding safety: HW flow is reduced if CW supply fails (and vice versa).
Constant temperature regardless of pressure or flow rate variations.
Body with smooth interior and low water volume (reduces niches where bacteria can develop).
Flow rate regulated at 9 lpm.
Chrome-plated brass body and sculptured control lever.
M1/2" shower outlet with integrated non-return valve.
Mixer with offset standard STOP/CHECK wall connectors, M1/2" M3/4".
Filters and non-return valves.
• Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).
• Shower head retaining collar (ref. 830).
Shower riser rail is ideal for healthcare facilities, retirement homes, hospitals and clinics.
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

© Delabie

TECHNICAL CHARACTERISTICS

Shower riser rail with EP mechanical mixer - Ref.2739EPSKIT

Technology	SECURITHERM with pressure-balancing, Securitouch
Length	182 mm
Flow rate	9 lpm
Connector	M1/2"
Finish	Chrome-plated brass
Depth	176 mm

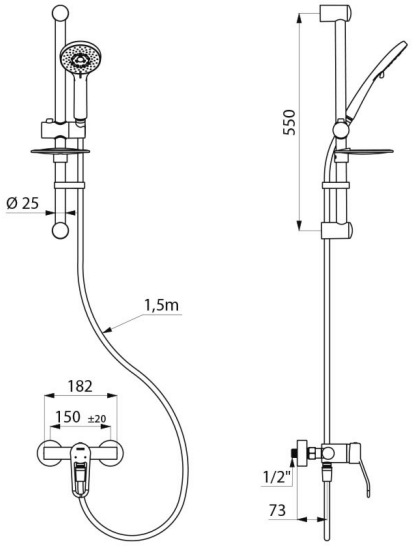

© Delabie