DELABIE

TEMPOMATIC 4 electronic tap

Ref. 44000615

Integrated battery, stopcock Ø 15mm



DESCRIPTION

TEMPOMATIC 4 electronic tap - Ref.44000615

Deck-mounted electronic basin tap:
Battery-operated with integrated 123 6V Lithium batteries.
Reduced stagnation solenoid valve and electronic unit integrated into the body of the tap.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.
Scale-resistant flow straightener.
Duty flush (~60 seconds every 24 hours after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Chrome-plated solid brass body.
Cap fixed in place by two concealed screws.
PEX flexible Ø 15mm for compression fittings with stopcock, filter and non-return valve.
Fixing reinforced by two stainless steel rods.
Anti-blocking security.
Suitable for people with reduced mobility.
10-year warranty.

*Add CR to the end of the reference (44000615CR) to order with copper tails.


ADVANTAGES

- Total hygiene: no manual contact
- 90% water savings
- Batteries integrated in tap body
- Duty flush limits bacterial proliferation

TECHNICAL CHARACTERISTICS

TEMPOMATIC 4 electronic tap - Ref.44000615

Technology	Electronic
Flow rate	3 lpm
Connector	M1/2" Ø 15mm
Supply	6V batteries
Drop Height	75 mm
Spout Length	110 mm
Installation:	Deck-mounted

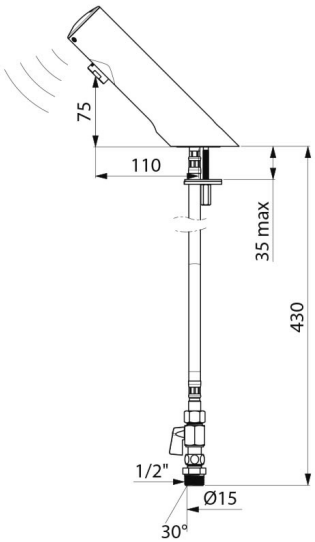

© Delabie