DELABIE

BLACK BINOPTIC electronic tap

Ref. 478035

Battery-operated



DESCRIPTION

BLACK BINOPTIC electronic tap - Ref.478035

Deck-mounted electronic basin tap:
Independent IP65 electronic control unit.
123 6V Lithium battery-operated.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.5 to 6 lpm.
Scale-resistant flow straightener.
Adjustable duty flush (pre-set flush ~60 seconds every 24hr after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Chrome-plated brass body.
Matte black chrome finish.
PEX flexible with filter and solenoid valve M3/8".
Fixing reinforced by 2 stainless steel rods.
Anti-blocking safety.
Spout with smooth interior and low volume of water (reduces niches where bacteria can develop).
Suitable for people with reduced mobility.
10-year warranty.


ADVANTAGES

- Total hygiene: no manual contact
- 90% water savings
- 100% matte black chrome finish
- Anti-bacterial proliferation duty flush

TECHNICAL CHARACTERISTICS

BLACK BINOPTIC electronic tap - Ref.478035

Technology	Electronic
Flow rate	3 lpm
Connector	M3/8"
Finish	Matte black chrome
Supply	6V batteries
Drop Height	90 mm
Spout Length	125 mm
Installation:	Deck-mounted

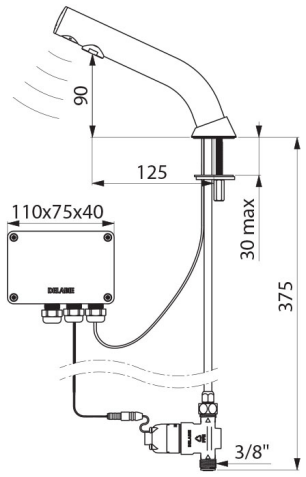

© Delabie