DELABIE

# TEMPOMATIC MIX 4 electronic mixer

Ref. 493400

Mains supply (recessed unit)



## DESCRIPTION

**TEMPOMATIC MIX 4 electronic mixer - Ref.493400**

Wall-mounted electronic basin mixer:
230/6V recessed mains supply.
Reduced-stagnation solenoid valve and electronic unit integrated into the body of the mixer.
Flow rate pre-set at 3 lpm at 3 bar, can be adjusted from 1.4 - 6 lpm.
Scale-resistant flow straightener.
Duty flush (~60 seconds every 24 hours after last use).
Active, infrared presence detection, sensor at the end of the spout optimises detection.
Chrome-plated metal body L. 160mm.
Cap fixed in place by 2 concealed screws.
Stopcocks.
Wall-mounted.
Recessed inlets ½".
Top or bottom supply.
Anti-blocking security.
Side temperature control with adjustable maximum temperature limiter.
Suitable for people with reduced mobility.
10-year warranty


## ADVANTAGES

- Total hygiene: no manual contact
- 90% water savings
- Recessed mains supply
- Anti-bacterial proliferation duty flush

## TECHNICAL CHARACTERISTICS

**TEMPOMATIC MIX 4 electronic mixer - Ref.493400**

| | |
|---|---|
| Technology | Electronic |
| Debit | 3 lpm |
| Conector | 1/2" |
| Supply | 230/6V mains supply (recessed) |
| Spout Length | 160 mm |
| Installation: | Wall-mounted |

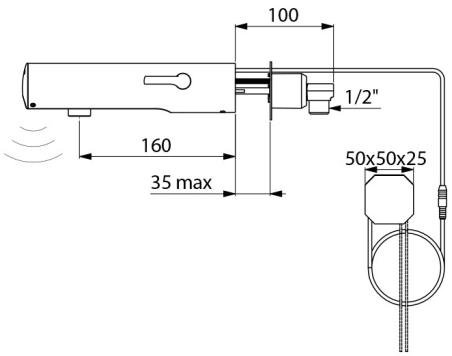


© Delabie