DELABIE

TEMPOMATIC shower kit



Ref. 452159

Electronic



DESCRIPTION

TEMPOMATIC shower kit - Ref.452159

Cross wall electronic shower kit:
TEMPOMATIC electronic valve for mixed water supply.
For walls ? 155mm.
Power supply by electronic unit with solenoid valve 1/2".
230/12V transformer.
2 operation modes:
- Automatic activation via presence detection.
- Voluntary ON/OFF activation by passing the hand in front of sensor ~10 cm.
Duty flush (~60 seconds every 24 hours after the last use).
Adjustable time flow from 30 to 60 seconds.
Flow rate set at 6 lpm at 3 bar.
Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.
Chrome-plated solid brass.
Wall plate flush to the wall.
Threaded rods can be cut-to-size.
Suitable for people with reduced mobility.
10-year warranty.

ADVANTAGES


- 230/12V
- Total hygiene: no manual contact
- Anti-bacterial duty flush
- 2 operation modes

TECHNICAL CHARACTERISTICS

TEMPOMATIC shower kit - Ref.452159

Technology	Electronic
Lungime	155 mm
Debit	6 lpm
Conector	1/2"
Supply	230/12V mains supply



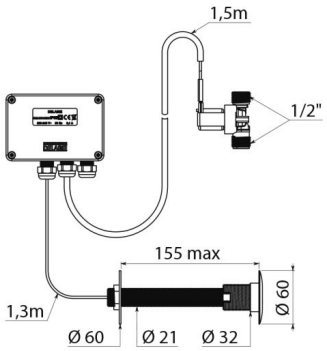

© Delabie